

VACUUM PUMP

LINEAR

VP0625




MOTOR FREE
PISTON SYSTEM



Airflow & Power Consumption


Specifications

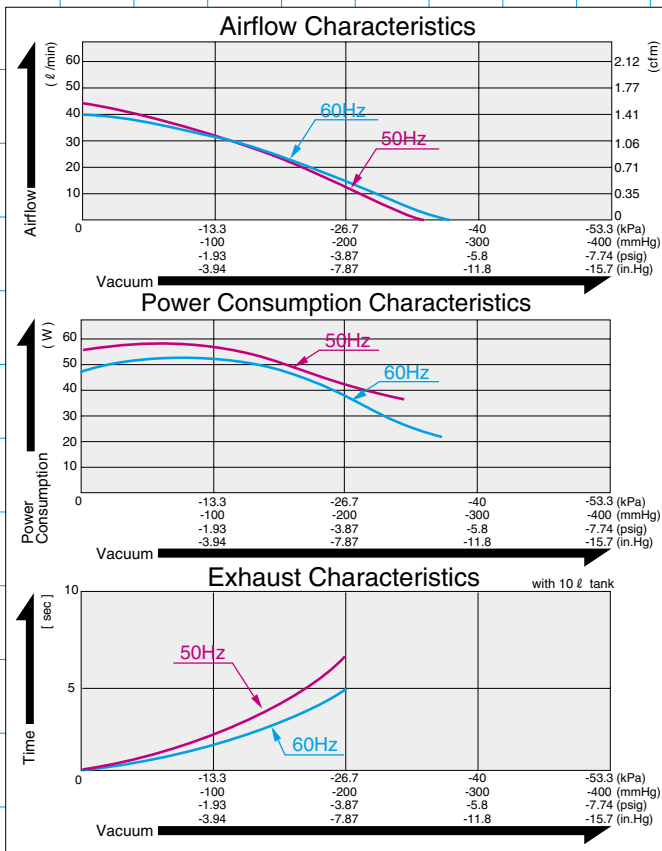


	(SI)	(EURO)	(U.S.A.)
Attainable Vacuum	-33.3 kPa (-250 mmHg)	-333 mbar	-9.84 in.Hg
Free Air Displacement	40 ℓ/min		1.41 cfm
Rated Voltage	115 V AC or 230 V AC		
Power Consumption	56 W or 60 W		
Rated Frequency	60 Hz or 50 Hz		
Life Expectancy	10,000 hours		
Inlet	15 mm O.D. hose nipple		
Outlet	ISO Rc 1/4 (female threaded)		
Duty Cycle	Continuous		
Coil Insulation Class	E or its equivalent (JETL) or B for UL		
Mounting Dimensions	68 (L) x 84 (W) mm	2-11/16" (L) x 3-5/16" (W)	
Gross Weight	3 kg	6.6 Lbs.	
Leadwire Length	235 mm or 320 mm	9-13/16"	

Please read the page of "How to Use This Catalog" first for correct use of compressors and pumps.

Application Examples



Microfiche Camera



Solar Collection Screen

Sketch Drawing and Mounting Dimensions Diagram (mm)

